

Slim LED AC/Emergency Outdoor Light

FEATURES

- Durable die-cast housing in Dark Bronze, Black or White powder-coat finish
- Wall Mount with Universal KO and ½" NPT single conduit entry
- Includes 8 high power LEDs with operation in AC normally On and emergency mode
- Long life Nickel Cadmium Battery
- Includes Self-Test/Self-Diagnostic for worry-free operation and status
- Available in 3000K or 4000K color temperature
- Temperature Range: Standard: 0°C to 50°C
- Heater Option: -25°C to 50°C
- UL924 Wet Location Listed





EMERGENCY LIGHTING

ORDERING INFORMATION

Catalog Number	Description
CUSO DB	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., Dark Bronze
CUSO DB-H	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., Dark Bronze, Heater
CUSO BK	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., Black
CUSO BK-H	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., Black, Heater
CUSO WH	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., White
CUSO WH-H	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., White, Heater
CUSO4DB-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., Dark Bronze
CUSO4DB-H-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., Dark Bronze, Heater
CUSO4BK-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., Black
CUSO4BK-H-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., Black, Heater
CUSO4WH-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., White
CUSO4WH-H-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., White, Heater

ELECTRONICS

- 120-277VAC, 60Hz input
- Battery re-charge within 24 hours
- Passive Infra-Red Sensor
- AC-On and Push-to-Test Switch

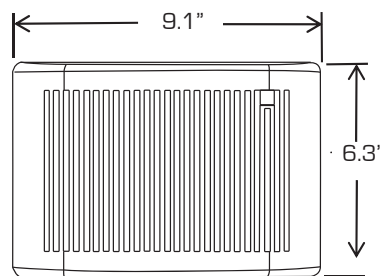

Single Carton Weight: 4 lbs.
Master Carton Quantity: 6 each