

# XTREME POWER CONVERSION P90

Online UPS // 120VAC

For more information, visit [www.xpcc.com/p90](http://www.xpcc.com/p90)



## Online rack/tower UPS delivers clean and continuous power to IT equipment during power disturbances

The P90 is a true online UPS that delivers continuous, high quality AC power to servers and network equipment with no break when transferring to battery.

The P90 provides tower, rack, and wall mount options (2U units). It protects your equipment from blackouts, brownouts, sags, surges, and noise interference. The P90 offers the lowest total cost of ownership by cutting energy costs and lowering heat output.

For maintenance bypass options, reference the XBDM at [www.xpcc.com/xbdm](http://www.xpcc.com/xbdm)

### PRODUCT SNAPSHOT

- › Available models: 1000VA, 1500VA, 2000VA, 3000VA
- › Tower, wall (2U units), 2-post and 4-post rack mounting configurations available in 1U or 2U
- › UL, cUL, RoHS, TAA compliant
- › 3 years electronics, 3 years battery warranty (USA and Canada)

### FEATURES

**Auto restart**—after full battery discharge, the P90 automatically restarts when utility power returns

**98% efficient operation**—high efficiency ECO mode lowers energy consumption

**Smart LCD display**—vital monitoring and precise information from the front panel (2U units)

**Frequency converter**—P90 can be programmed to convert from 50Hz to 60Hz or 60Hz to 50Hz

**Load shedding capabilities**—maximize uptime for critical loads and equipment by shedding less critical loads

**Extended battery runtimes**—optional matching battery modules available with 1500VA, 2000VA, and 3000VA models for extended runtimes

**Hot swappable battery**—easy to replace without interrupting the load

**Maintenance bypass**—an optional XBDM bypass module enables the P90 to be replaced or serviced without interruption of power to critical loads

**Surge Protection**—800J of surge protection

**\$50,000 load protection policy**—protection against damaged connected equipment

**XTREME**  
Power Conversion®

Protect your business.

# MODEL SELECTION GUIDE

For more information, visit [www.xpcc.com/p90](http://www.xpcc.com/p90)


MODEL NUMBER		P90c-1000	P90-1000	P90-1500	P90-2000	P90-3000
CAPACITY	Power rating	1000VA (800W)	1000VA (900W)	1500VA (1350W)	2000VA (1800W)	3000VA (2700W)
INPUT	Voltage/frequency	50–150VAC* / 50/60Hz auto-sensing				
OUTPUT	Voltage	120VAC	120VAC nominal (100/110/115 selectable)***			
	Waveform	Pure sine wave, < 2% at full load				
	Frequency	50/60Hz ± 0.5Hz				
	Efficiency	Up to 98% ECO mode, 90% online mode				
	Overload capacity	≤ 130% for 2 min; ≤ 200% for 10 sec; >200% for 1 sec				
BATTERY	Battery type	Sealed, maintenance-free lead acid				
	Battery quantity & size	(4) 6V 290W	(2) 12V 9AH	(3) 12V 9AH	(4) 12V 9AH	(6) 12V 9AH
	Typical recharge	< 6 hours to 90%	< 4 hours to 90% with 1A charger current			
PHYSICAL	Dimensions (W x D x H)	17.2 x 17.8 x 1.7 in	17.2 x 15.1 x 3.5 in	17.2 x 18.9 x 3.5 in		17.2 x 25.8 x 3.5 in
	Weight	28 lbs	29.1 lbs	41.7 lbs	47.4 lbs	65.7 lbs
	Line cord	5 ft, 5–15P	6 ft, 5–15P	6 ft, 5–15P	6 ft, 5–20P	6 ft, L5–30P
	Receptacles	(3) NEMA 5–15R	(8) NEMA 5–15R		(8) NEMA 5–15/20R	L5–30R+(4)5–15/20R
	Model number	N/A		P90-BP36 / 36E	P90-BP48	P90-BP72
OPTIONAL BATTERY PACKS	Dimensions (W x D x H)	N/A		17.2 x 18.9 x 3.5 in**	17.2 x 18.9 x 3.5 in	17.2 x 23.6 x 3.5 in
	Weight	N/A		58.1 lbs/104.4 lbs (E)	74.6 lbs	104.4 lbs
	Battery	N/A		(6) 12V 9AH/36V**	(8) 12V 9AH / 48V	(12) 12V 9AH / 72V
	Operating temperature	32–104°F (0–40°C)				
ENVIRONMENT	Altitude	11,500 ft above sea level				
APPROVALS	UL, cUL, RoHS, TAA compliant					
WARRANTY	3 years electronics, 3 years battery warranty (USA and Canada)					
COMMUNICATIONS INTERFACE	RS-232, USB, EPO, intelligent slot for optional cards (Web/SNMP, Relay/dry contact, Modbus)					
INCLUDED IN BOX	ViewPower software, horizontal brackets, tower pedestals, user manual					
AVAILABLE OPTIONS	5 year extended warranty, bypass distribution (XBDM), power distribution (XPDU), 4-post rail kit, 2-post shelf kit, wall mount bracket (2U units)					

Rack depth is front bracket to unit panel. Add 1" for depth including front bezel. \*Depending on load level. \*\*BP36E is 23.6" deep and includes (12) 12V 9AH/36V. \*\*\*P90 capacity derates 20% at 100V output voltage.

## BATTERY RUNTIMES

Percentage load:	Internal batteries		(1) Battery pack		(2) Battery packs	
	50%	100%	50%	100%	50%	100%
P90c-1000	20	7	N/A	N/A	N/A	N/A
P90-1000	12	3	N/A	N/A	N/A	N/A
P90-1500 (BP36)	12	3	48	20	94	38
P90-1500 (BP36E)	12	3	94	38	N/A	N/A
P90-2000 (BP48)	12	3	48	20	94	38
P90-3000 (BP72)	12	3	48	20	94	38

Maximum of two battery packs per P90-1500, P90-2000, or P90-3000 (excluding BP36E). Runtimes are shown in minutes and will vary based on battery condition, age, cycles, and ambient temperature.

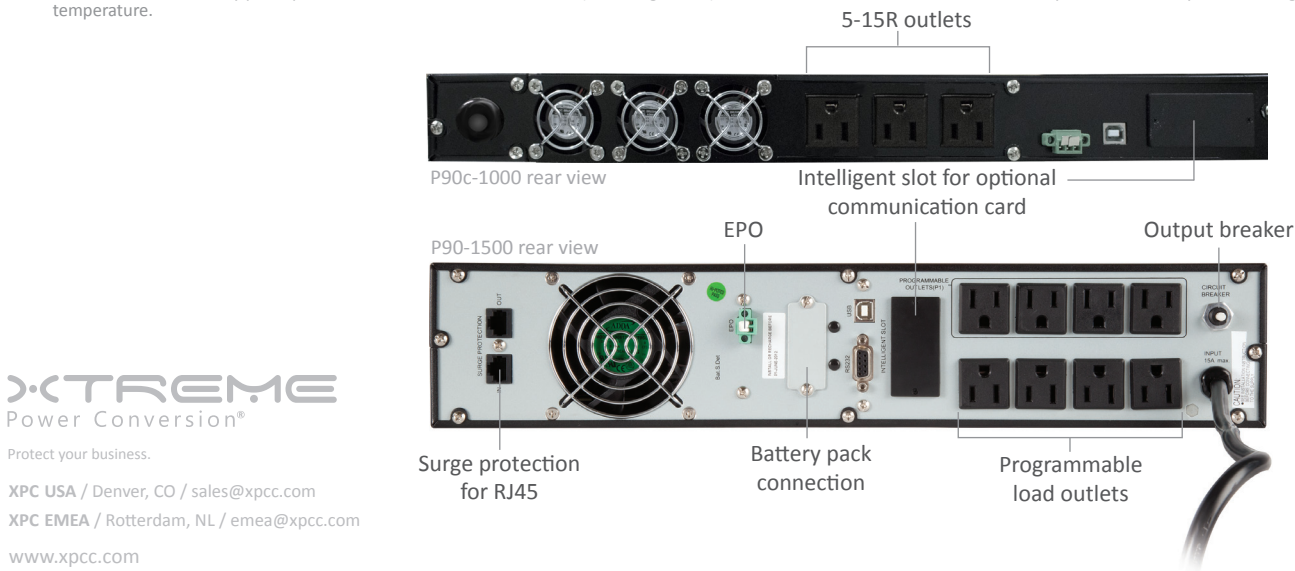

**X-TREME**  
Power Conversion®

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

XPC EMEA / Rotterdam, NL / emea@xpcc.com

www.xpcc.com